


# 50cc Sport Cub S2 Addendum

This addendum will cover the following issues for the 50cc Sport Cub S2.

If you have any questions regarding the installation of this new hardware please call Aeroworks at (303)-371-4222.


## Step #6 Page 33

1. The front L bracket mounting bolts have been changed from 15mm in length to 10mm. These new mounting bolts are included in this addendum.

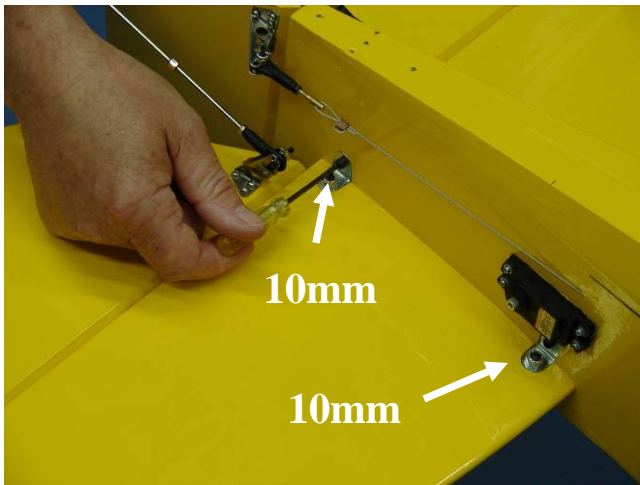

## Step #1 Page 34

The removable wooden spacer in the front L bracket mounting location has been covered over. If you wish to remove this tab as shown in the manual the covering will need to be removed. Follow the remaining steps in the manual once the covering has been removed.

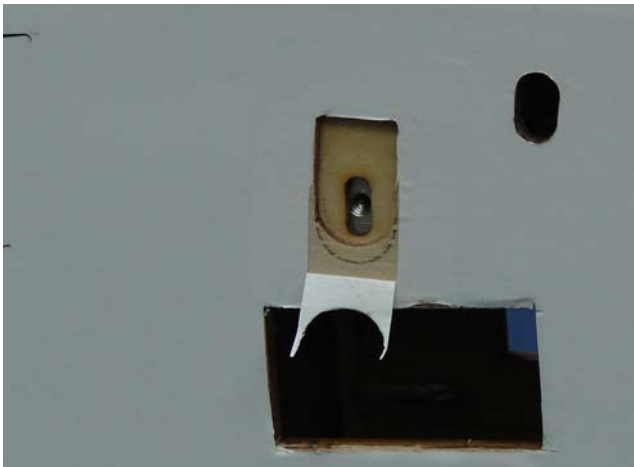

## Step #1 Page 22 Part A

1. (6) 4-40x20mm Bolts and nuts are included in the supplied hardware. These can be used to mount the rudder control horns. The builder will need to drill 6 mounting holes through the rudder using the smaller holes as a guide. **Thick CA** must be placed on the nuts after they have been tightened to prevent them from loosening in flight.



## Step #1 Page 22 Part B


1. (12) #2x8mm wood screws have been included with this addendum. It is the builder's choice to use these screws or the bolts shown above. Follow the steps in the manual if using these mounting screws.



## 50cc Sport Cub S2 Addendum

### Step #5 Page 18

1. The eyelets included in the strut hardware pack are incorrect. Please use the eyelets provided in the addendum and discard the included eyelets.

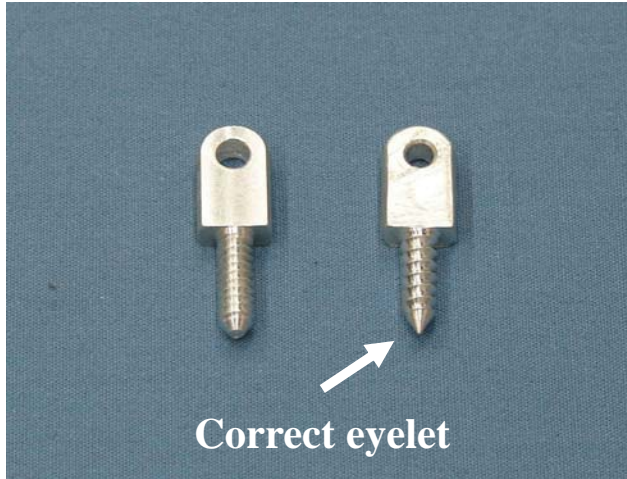

### Step #4 Page 79

1. The 6-32x16mm strut mounting bolts are too long and may damaged the fuse, they have been replaced with 6-32x12mm bolts. Please use the new bolts provided in this addendum.

